

WADE-8055

High Performance Intel® Core™ 2 Duo processor based Mini-ITX Board with Two COM and Two GbE



FEATURES

- Intel® Core™ 2 Duo processor
- Intel® 945G GMCH Chipset
- Max. 4GB, DDR2 SDRAM in dual SO-DIMM sockets
- Four SATA ports support
- Two GbE-LAN ports and one PCI slot
- Max. two COM and eight USB 2.0 ports
- All capacitors are solid type

WADE-8055 is an industrial-grade Mini-ITX board with best C/P ratio. The LGA775 CPU socket enables WADE-8055 to support wide range processors, such as Intel® Core™ 2 Duo, Pentium® 4 or Celeron® CPUs. With special heatsink design, WADE-8055 can

run with Celeron 440 35W processor without any fan. Moreover, all solid type capacitors enhance the durability, stability and reliability of the board as well.


SYSTEM

CPU	Intel® Core™ 2 Duo / Pentium® 4 / Celeron® D processor
FSB	FSB 1066/800/533 MHz
BIOS	Award BIOS
System Chipset	Intel® 945G + ICH7
System Memory	2 x 200-pin DDR2 SO-DIMM socket support up to 4GB dual channel 667/533 MHz
Storage	Support 4 SATA 300 drives
SSD	1 x Compact Flash
Watchdog Timer	Reset; 1 sec.~255 min. and 1 sec. or 1 min./step
H/W Status Monitor	Monitoring system temperature, voltage, and cooling fan status. Auto throttling control when CPU overheats
GPIO	On-board programmable 8-bit Digital I/O interface
Expansion	1 x PCI slot

MECHANICAL & ENVIRONMENTAL

Power Requirement	TBD
Operating Temperature	0~55°C
Operating Humidity	0%~90% relative humidity, noncondensing
Size (L x W)	6.69" x 6.69" (170 mm x 170 mm)
Weight	0.94 lbs (0.43 Kg)

REAR I/O

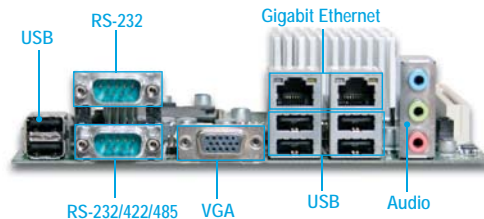

I/O

MIO	4 x SATA, 1 x RS-232, 1 x RS-232/422/485 selectable
IrDA	N/A
USB	6 x USB 2.0 ports and 2 x USB 2.0 with header
Audio Interface	Mic In, Line In, CD Audio In, Line Out
Ethernet Interface	IEEE 802.3 10/100/1000BASE-T Gigabit Ethernet compliant

DISPLAY

Chipset	Intel® 945G GMCH
Display Memory	Integrated Intel® Graphics Media Accelerator GMA 950, and share system memory to 224 MB
Resolution	Analog Display: Up to 2048 x 1536 (QXGA)
VGA/LCD Interface	Intel® Graphics Media Accelerator GMA 950
LVDS	N/A

ORDERING GUIDE

- **WADE-8055**
Intel® Core™ 2 Duo / Pentium® 4 / Celeron® D processors Mini-ITX Board
- **PEP-581R/582R**
One/Two slots PCI riser card
- **PEP-572L**
Two slots PCI riser card (Cable type)

- * Specifications are subject to change without notice.
- * Celeron®, Pentium® III, Pentium® 4 and Xeon™ are registered trademarks of Intel® Corporation.
- * Other trademarks, logo, brands and company names are the property of their respective owners.



Portwell, Inc. (Headquarters)
4F, No. 186, Jian-Yi Rd., Chung-Ho City,
235 Taipei, Taiwan
Tel: +886-2-77318888
Fax: +886-2-82271109
E-mail: info@portwell.com.tw
http://www.portwell.com.tw

American Portwell
Fremount Tel: +1-510-403-3399
Norcross Tel: +1-510-403-3399
E-mail: info@portwell.com
http://www.portwell.com

Portwell Japan, Inc.
Tokyo Tel: +81-3-5298-8071
Osaka Tel: +81-6-4791-2201
E-mail: info@portwell.co.jp
http://www.portwell.co.jp

Beijing Portwell
Beijing Tel: +86-10-82701616
Shanghai Tel: +86-21-3222-0505
Shenzhen Tel: +86-755-8621-7695
E-mail: info@portwell.com.cn
http://www.portwell.com.cn

Portwell-Laxsons India
Tel: +91-22-2685-9911
E-mail: info@portwellaxsons.com
http://www.portwellaxsons.com

Portwell, B.V.
Tel: +31-252-620790
E-mail: info@portwell.nl
http://www.portwell.nl

Portwell (UK) Ltd.
Tel: +44(0)1235-750760
E-mail: info@portwell.co.uk
http://www.portwell.co.uk